Our Product Introduction

Sound Filter PVC Metal Power Mass Loaded Vinyl Flame Retardant Soundproofing Solution

Basic Information

Place of Origin: Guangdong, China
 Brand Name: MQ, MQ Acoustics
 Minimum Order Quantity: 100 square meters

• Price: \$1.99 - \$29.99/square meters

Packaging Details: Polypropylene(PP) Knitted Bag + Pallet
 Supply Ability: 5000 Square Meter/Square Meters per

Month



Product Specification

Warranty: 5 Years

After-sale Service: Online Technical Support, Return And

Replacement

• Project Solution Capability: Total Solution For Projects, Others

Application: Office Building

Design Style: Modern

Product Name: Mass Loaded Vinyl

Density: 23-30kg/roll
 Specification: 1x5m, 1x10m

• Thickness: 1.2/1.8/2/2.8/3/4/5mm

Usage: Sound Filter
HS Code: 401699909
Material: PVC+Metal Power
Package Details: Plastic Bag


Acoustic Coefficient: 16-26 Db



More Images









Products Description

Magic Cube Mass Loaded Vinyl is produced with environmentally friendly and harmless green raw materials. It is moisture-proof, corrosion-resistant, and mildew-resistant. Since the mass loaded vinyl has good tensile performance, which makes the installation convenient and quick.

Moreover, the higher areal density brings superior sound insulation performance, which effectively suppresses the propagation of mid and low-frequency sound waves. There are many ways to use it. When used in combination, the sound insulation vinyl makes up for the shortcomings of the sound insulation performance of each board in the resonance and anastomotic performance.

Details Images

Mass Loaded Vinyl

The mass loaded vinyl is produced with environmentally friendly and harmless raw materials. It is moisture-proof, corrosion-resistant and mildew-resistant. Since the mass loaded vinyl has good tensile performance, which makes the installation convenient and quick. Moreover, the higher areal density brings superior sound insulation performance, which effectively suppresses the propagation of mid and low-frequency sound waves.



Specifications

Material	PVC,etc.
Thickness	1.2mm, 2mm, 3mm
Dimensions	1m x 10m, 1.2m x 5m/ roll
Weight	2-5kg/m2 or 10kg/m2
Customization	Thickness: 1.2-5mm Width: 1.3m maximum Length: 10m maximum (advise)






Applications


Mainly used in the construction industry, conference rooms, factories, multi-function halls, KTV rooms, pipes (water pipes/wind pipes) and offices where noise reduction is required.







Wall Installation Guide

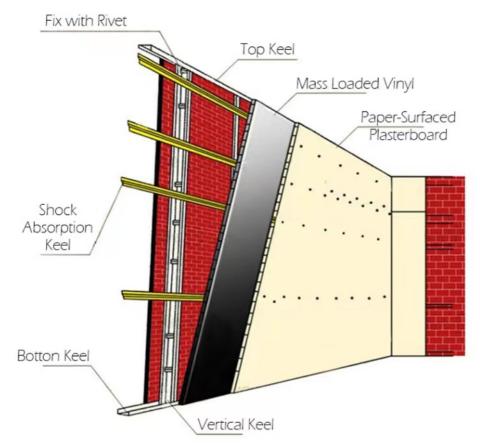

How Is Mass Loaded Vinyl Used

You can sandwich Mass Loaded Vinyl soundproofing between drywall layers or other building materials to create noise reducing ceilings, floors and wall soundproofing for homes, commercial buildings and industrial facilities.





Product packaging





FAQ

1. Why choose us?

Over 10 years' Professional manufacturing experiences on rubber and plastic products.

Low MOQ to start small business. It is appreciated to grow up with you for a long time cooperation.

Best factory price with relative quality.

Free sample to check products quality.

Meet buyer's different standards for different uses.

On-time delivery.

2. What is MOQ?

It depends on different products. Pls contact us for specific quantity.

3. Do you accept OEM/ODM ?

Yes, we can do OEM and ODM with your brands

4. What's your leading time?

For normal samples, it will be sent within 24hours. For customized samples, it usually 3 to 7days.

For normal orders, the production time is about 5 to 25days for a 20ft container.

Pls contact our sales representatives for details.

5. How to get a sample?

Small samples can be provide for free, you only need to cover freight cost, the freight can be deduct from the payment of

order.

For customized samples, pls contact us for sample cost.

For more information, please feel free to contact us.





18022418653



sales002@mq-acoustics.com



acousticpanelwalls.com

KeZhu Business Building, ZhuJi Road, TianHe District, GuangZhou, China