26kg/pcs Weight Sound Absorption Acoustic Panel with Custom Walnut Wood Slat Design

Basic Information

- Place of Origin:
- Brand Name:
- Certification:
- Minimum Order Quantity: 100 pieces
- Price: \$21.99/pieces 100-499 pieces

5000 Piece/Pieces per Month

GUA

MQ

CE

- Packaging Details: Pallet and carton box
- Supply Ability:



Product Specification

 Warranty: 	1 Year
After-sale Service:	Online Technical Support, Other
 Project Solution Capability: 	3D Model Design, Others
 Application: 	Apartment, Bedroom, living Room
 Design Style: 	Modern
 Product Name: 	Wood Slat Acoustic Panel
Standard Size:	2400*600*21 Mm/ Customized
 Polyester Thickness: 	9mm/12mm
• Finish:	Melamine, Veneer, HPL, Coating
Pattern:	MDF 27mm, Edge To Edge 13mm / Customized
• Type:	Sound Absorption Acoustic Panel
• MOQ:	50 Square Meter
• Weight:	26kg/pcs
 Highlight: 	sound absorption wood slat panels,



More Images





Products Description

Standard Size	2400/2700*600*21.5mm / customized	
Finish	Melamine/Veneer/Painting	
Material	MDF + Polyester Fiber	
Pattern	MDF 27mm, Edge to edge 13mm/customized	
Function	Sound absorption, Interior decoration	
NRC	0.85~0.94, SGS Test for polyester panel	


MQ acoustic wooden slat wall panels range offers a luxury quality, state of the art, noise-reducing wood panelling solution. Each panel has been handcrafted not only to transform projects visually but also to create a more quiet, comfortable environment. The natural wood range is produced with a luxury quality, smooth wood veneer finish. Lamella strips with a clean, modern appearance are mounted onto a uniquely designed, recycled acoustic felt material. Fast and simple installation allows you to quickly transform any space.

Details Images

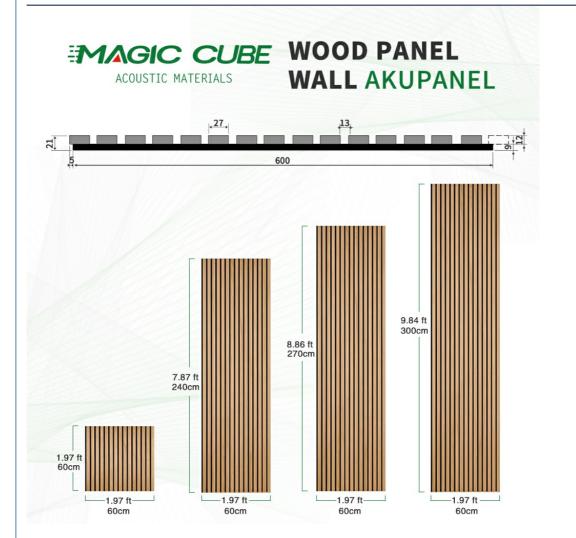


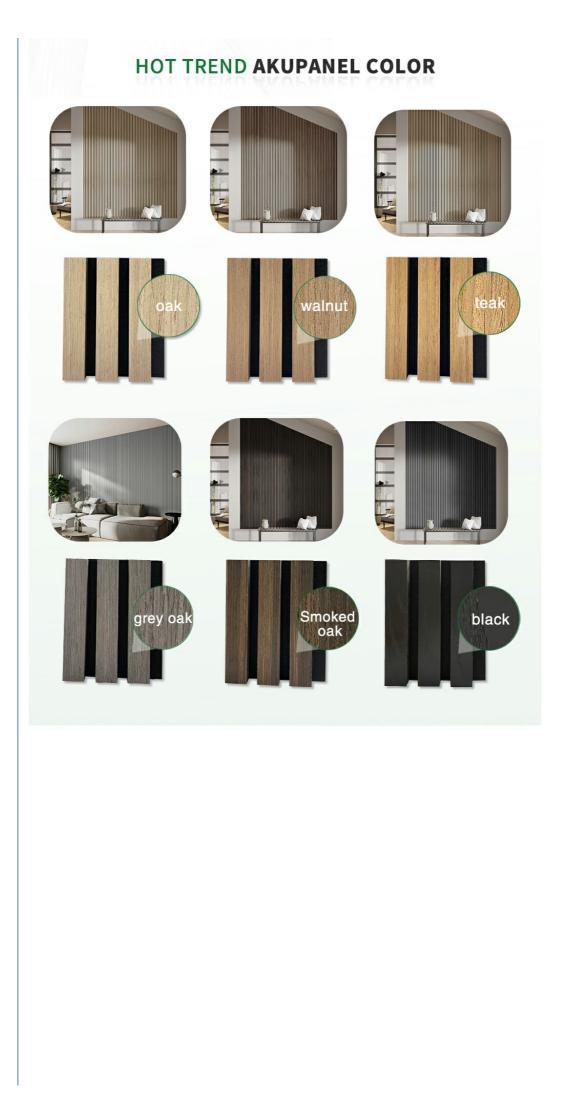



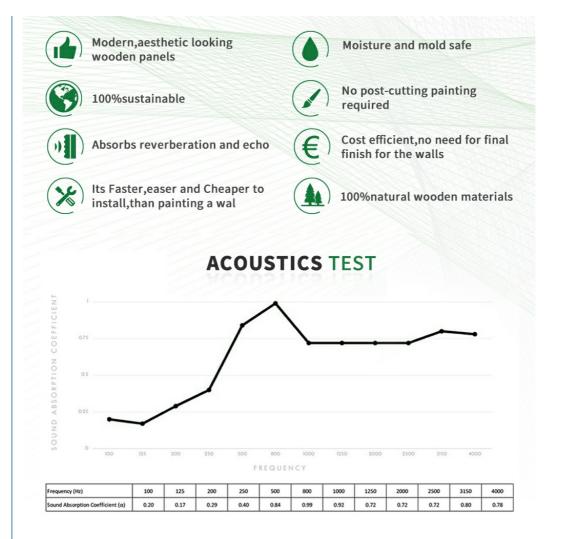

Installation

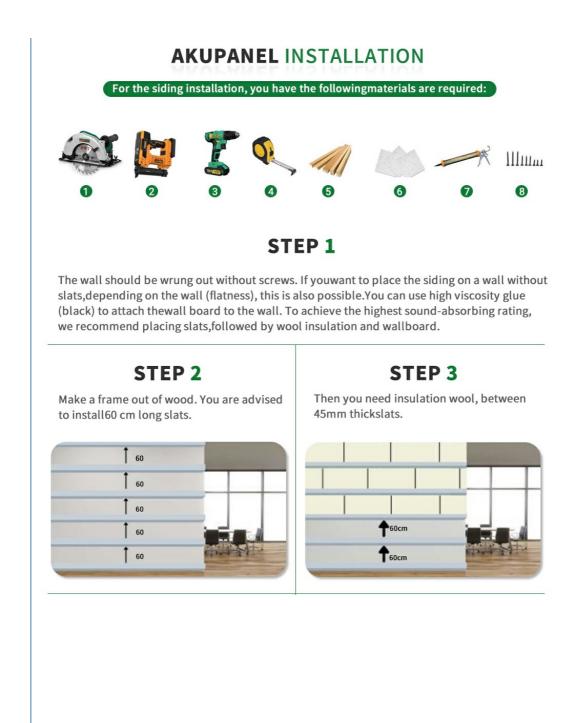

STEP 4

The wall panels are then screwed onto the slatted frame.For each wall panel, wii 15 recommends 3 screws per row.




STEP 6

If your wall is higher than 270cm, you can attachwall panels. Please note the follow -ing tips! It ishighly recommended to use a circular saw toshorten the edge of the siding by about 3mmso that the edge is absolutely flat. As a result, the seam will be minimal visible when placin-gtwwall panels. When you are sawing, you need to reinforce the area where you are sawing, andyou can do this by adding screws or staples aboveor below the area where you are sawing slats.



STEP 7


To attach panels to the ceiling, the instruc -tionsare almost identical to those for attaching to thewall. See the tips below! Because we live on Earth, the law of gravi -tation applies here. Before attachingthe panels to the ceiling, it is highly recomm -endedto screw or staple the slats to the felt, at least 3 rows, as shown below. This prevents the panel from sinking

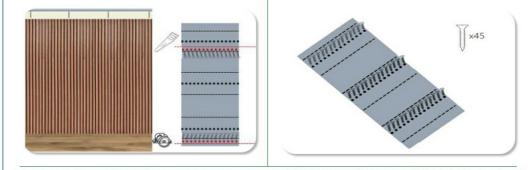

Packing & Delivery

STEP 5

If one end of the wall is shorter than the width of the siding, we recommend using a board cutter tocut the siding along the slats to the width you need.

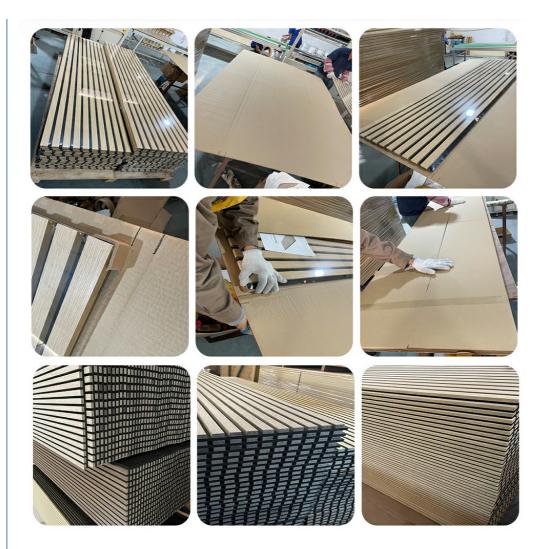

Company Profile

ABOUT US



Why Choose To Join MQ

We are the most innovative manufacturer in the industry in China.

Our team of global professional engineers and consultants are highly qualified.

Our company specializes in the development of sound-absorbing panel products.

We have over 10 years of experience in the field of sound-absorbing panels.

We have 4 production lines and can deliver products within 7 days.

Our annual production capacity is 1,000,000 square meters



TEAM ACTIVITY



At MQ Acoustic, you can buy your natural acoustic panels at an affordable price. While quality is of great importance, price is also very important! We deliver directly from the manufacturer to the customer, which means we don't have to deal with intermediaries. We apply bulk prices to ensure that you can give your interior an eye-catching look at affordable prices.

FAQ

What do I need for installation?

For installation, you will need a drill and any appropriate fastening hardware. For example, if you're mounting into drywall (rather than studs), you'll want to purchase drywall anchors with the appropriate screws. Please note screws are not included with the panel.

Can I cut the panels?

Yes, absolutely. The panels are easy to cut using a handsaw or a circular saw. Simply measure twice and cut once!

Can I hang a TV from the panels?

We don't recommend hanging a TV directly from the panels, instead cut out a gap for the TV mount and mount it to your wall as you regularly would. From there, you can install the panels around the mount before hanging your TV from the mount.

How do I wash the panels?

The best way to wash the slats is with a well-wrung cloth or duster. If you ever want to clean the felt between the slats, simply use a vacuum.

Guangzhou Mq Acoustic Materials Co., Ltd				
Q	18022418653	Sales002@mq-acoustics.com	@ acousticpanelwalls.com	
KeZhu Business Building, ZhuJi Road, TianHe District, GuangZhou, China				