Basic Information

• Place of Origin: Guangdong, China • Brand Name: MQ Acoustic . Certification: CE, ASTM, ISO 3D Acoustic Lamp . Model Number:

• Minimum Order Quantity: 10 pieces

• Price: \$24.9/pieces 10-199 pieces

• Packaging Details: Carton Box • Delivery Time: 8-15 days • Payment Terms: T/T

. Supply Ability: 1000 pieces per week



Product Specification

• Product Name: 3D Acoustic Lamp Base Material: PET Fiber

• Surface: 100% Polyester · Color: Customization . Package: Carton Box

• Feature: Sound Absorption, Decorative, Waterproof Apartment, Commercial Offices, Music Studios • Application:

D30*H35cm · Size:



More Images











Product Description

Products Introduction

3D Acoustic Lamp

Discover our 100 % polyester lampshades—a seamless blend of feather-light elegance and robust resistance to moisture and UV. The finely woven, semi-sheer fabric softens LED light into a warm, soothing glow that enhances modern, farmhouse, or eclectic décor. Cleaning couldn't be easier—just wipe the surface or unzip covers for machine laundering. Available in

fade-proof palettes and linen- or silk-inspired textures at wallet-friendly prices. Crafted from recycled fibers, they marry ecocredentials with timeless sophistication—perfect for homes, cafés, and boutique hotels.

| Name | 3D Acoustic Lamp |
|----------------|--|
| Basic Material | 100% Polyester Fiber |
| Packing | Carton Packing |
| Size | D30*H35cm |
| Color | Customization |
| Featrues | sound absorption, Easy installation |
| Application | Concert halls, theaters, piano rooms, auditoriums, corridors, gymnasiums, conference rooms, multi-functional halls |

Details Images



Colorful, Casual Choice

Live a personalized life



Various Colors Available




Authoritative Quality Inspection Report




Sound absorption and noise reduction stronger

The highest sound absorption coefficient (NRc) is above 0.87 in the range of 125~4000HZ noise

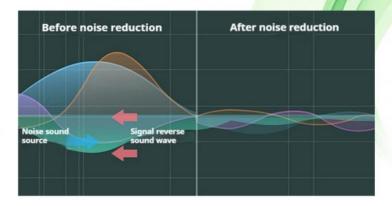


Sound-absorbing principleof sound-absorbing board

When sound waves enter the porous sound-absorbing materia Due to the viscous resistance of the air, the vibration friction between the air and the hole wall A considerable part of the sound energy is converted into heat energy and absorbed

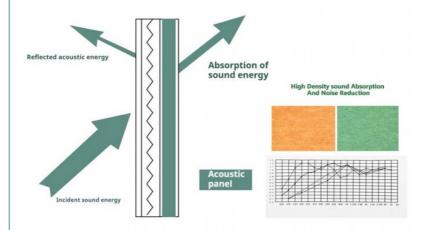


Sound absorption and noise reduction stronger

The highest sound absorption coefficient (NRc) is above 0.87 in the range of 125~4000HZ noise

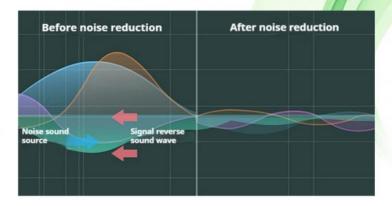

Sound-absorbing principleof sound-absorbing board

When sound waves enter the porous sound-absorbing materia Due to the viscous resistance of the air, the vibration friction between the air and the hole wall A considerable part of the sound energy is converted into heat energy and absorbed

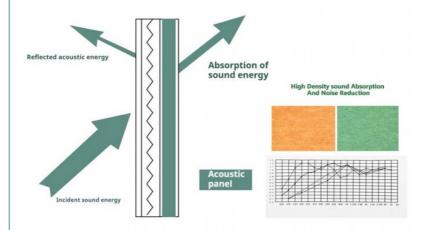

Commodity Parameters

Product size for manual measurement, error about 2cm, please prevail in kind



Ingenious Craftsmanship No Fear of Magnifying Details

Quality Products start From Details



Application scenario diagram

Widely used in lobby, corridor, meeting room, reception room, restaurant, residential and public buildings, schools, universities, library interior space







Company Profile



FAQ

1. Can I get free samples and how long does it take to produce samples?

If the samples you need are in our stock, they will be provided to you free of charge. Customized samples usually take about

week to produce.

2. Do you accept OEM or ODM order?

Yes, as a manufacturer, we can produce acoustic materials based on your samples or drawings. Please do not hesitate to contact us.

3. How to get an accurate quotation?

Can provide us with detailed product information, such as pattern, core material, surface, etc. If you have CAD or other drawings.

4. Payment terms

T/T 30% deposit before production, 70% balanced payment before delivery.

For more information, please feel free to contact us.

MAGIC CUBE Guangzhou Mq Acoustic Materials Co., Ltd





sales002@mq-acoustics.com



@ acousticpanelwalls.com