




Recycled Polyester Acoustic Panels Custom Colors Sound Absorbing Tiles

Our Product Introduction

for more products please visit us on acousticpanelwalls.com

Basic Information

- Place of Origin: Guangdong, China
- Brand Name: MQ Acoustics
- Minimum Order Quantity: 100pcs
- Price: 15.9/pc 100-200 pcs
- Packaging Details: Carton Box, Pallet
- Delivery Time: 5-8 work day
- Payment Terms: T/T

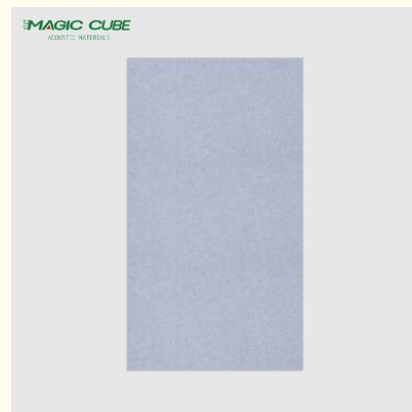


Product Specification

- Product Name: Polyester Fiber Acoustic Board
- Material: 100% Polyester Fiber
- Standard Size: 1220*2440mm/customized
- Thickness: 9/12/24mm/customized
- Density: 1350g-3700gsm
- Color: More Than 48 Colors To Be Chosen
- Application: Office Building, Office, Meeting Room, Multi-Function Hall, Etc.
- Origin: China
- NRC: 0.80-0.9
- Transport Package: Carton Box & Pallet
- Function: Interior Decoration And Sound Absorbing
- Warranty: 3 Years
- Acoustic Type: Sound Absorbing Material
- Shape: Hexagon



More Images



Product Description

Product Introduction

Product Name	Polyester Fiber Acoustic Panel
Application	Walls, Ceilings
Material	100% Polyester Fiber
Thickness	9mm / 12mm / 24mm
Color	more than 48 colors options (customizable upon request)
Size	1220*2440mm / 1200*600mm(custom sizes available)
Fire Rating	Class B
Eco-Certification	Meets E1 environmental standards, formaldehyde-free, odorless

Key Properties and How They Enable Sound Absorption

Porous Structure: This is the most critical feature. The felt is a labyrinth of tiny, interconnected open cells and channels. **Mechanism:** When sound waves enter this porous network, they cause the air molecules within the pores to vibrate rapidly. This vibration creates friction, which converts the acoustic (sound) energy into a negligible amount of heat energy, thereby dissipating the sound.

Performance: This structure is highly effective at absorbing mid-to-high frequency sounds (e.g., speech, ringing phones, clattering, engine whine).

Density and Thickness:

Density: A higher density felt provides more material for sound waves to interact with, increasing friction and absorption, particularly in the lower-mid frequency range.

Thickness: A thicker felt absorbs lower frequencies more effectively because the sound waves have to travel further into the material, losing more energy along the way. High-performance felts often come in various thicknesses (e.g., 10mm, 20mm) to target specific frequency ranges.

Material Damping:

The PET fibers themselves have inherent damping properties. They are slightly flexible and can vibrate, converting some of the sound energy, especially lower frequencies, into mechanical energy that is then dissipated as heat.



Polyester Fiber Acoustic Panel



MQ ACOUSTICS

PET Acoustic Panel Color Chart



AM-01 Snow White



AM-02 Porcelain White



AM-03 Camel



AM-04 Silver Gray



AM-05 Longan Yellow



AM-06 Deep Camel



AM-07 Pure Camel



AM-08 Copper



AM-09 Lemon Yellow



AM-10 Orange



AM-11 Milk Coffee



AM-12 Tangerine



AM-13 Light Coffee



AM-14 Light Yellow



AM-15 Fruit Green



AM-16 Plum Green



AM-17 Autumn Leaves Green



AM-18 Emerald Green



AM-19 Malachite Green



AM-20 Dark Green



AM-21 Smoke Gray



AM-22 African Gray



AM-23 Moonlight Gray



AM-24 Dark Gray



AM-25 Water Gray



AM-26 Light Sky Blue



AM-27 Sky Blue



AM-28 Sea Blue



AM-29 Turquoise Green



AM-30 Tiffany Blue



AM-31 Starry Sky Blue



AM-32 Dark Blue



AM-33 Dark Brown



AM-34 Red Coffee



AM-35 Coffee



AM-36 Sesame Black



AM-37 Linen



AM-38 Beige



AM-39 Flesh Pink



AM-40 Begonia Red



AM-41 AM Blue



AM-42 Black



AM-43 Watermelon Red



AM-44 Dark Red



AM-45 Pink



AM-46 Rose



AM-47 Violet



AM-48 Matcha



AM-49 BMW Blue



AM-50 Cyan Blue



AM-51 Rust Red



AM-52 Havana Orange



AM-53 PURE RED



AM-54 Pure Blue




AM-55



AM-56

Product Features

1/ **Excellent sound absorbing performance:**
The NRC can be 0.85 to 0.94

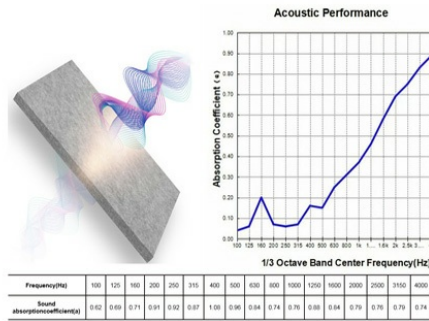

2/ **Easy installation**
To cut by knife and easy to install by glue or nail



3/ **Good physical stability**
Can meet ASTM E84-2016



4/ **Various of Color for Option**
Can easily realize the designer's inspiration



Company Profile

About Us



Magic Cube (MQ) Acoustics is a professional acoustic solution provider, integrating acoustic material manufacturing, architectural acoustical environment construction and industrial noise control. We are committed to the combination of Acoustics & Aesthetic, to offering our clients the best acoustic solution with high quality acoustic material.

In order to meet the higher needs of customers, we has introduced advanced production equipment which has fully guaranteed product quality and technology. After 5 years of rapid development, we has an annual output of more than 500,000 square meters of



various acoustic materials.



FAQ

1. Can I get free samples and how long does it take to produce samples?

If the samples you need are in our stock, they will be provided to you free of charge. Customized samples usually take about a

week to produce.

2. Do you accept OEM or ODM order?

Yes, as a manufacturer, we can produce acoustic materials based on your samples or drawings. Please do not hesitate to contact us.

3. How to get an accurate quotation?

Can provide us with detailed product information, such as pattern, core material, surface, etc. If you have CAD or other drawings,

don't hesitate to send it to us.

4. Payment terms

T/T 30% deposit before production, 70% balanced payment before delivery.

For more information, please feel free to contact us.



Guangzhou Mq Acoustic Materials Co., Ltd



18022418653



sales002@mq-acoustics.com



acousticpanelwalls.com

KeZhu Business Building, ZhuJi Road, TianHe District, GuangZhou, China